

BANTAM™

ANOTHER LUMENRAIL® COMPONENT FOR LIFE SAFETY AND LIGHT.

This post mount luminaire is designed for wall grazing and pathway illumination with mounting options for railings, walls, decks, and entry structures. Superior harsh environment protection and vandal resistance are combined with a simple field or factory prepared installation using included 316 stainless steel hardware. The Bantam provides an inconspicuous architectural solution for new or retrofit applications and egress compliance opportunities.



- Solid machined 316 stainless steel
- 116 lumens per watt LED (500mA)
- 70° beam spread @ 10° above nadir
- 5 IES file supported optic distributions
- IK10 impact rating
- 24VDC operation
- ETL wet location listed
- IP67 ingress protection
- Standard in 3000° K and 4000° K
- 4 CCT whites and solid colors available
- Wildlife amber
- Round or flat post mounting options

BANTAM™

PROJECT NAME: _____

REP AGENCY: _____

APPROX. QUANTITY: _____



SCAN QR CODE
for technical information, downloads, instructions,
and system configuration guides



BANTAM™
ANOTHER
LUMENRAIL®
COMPONENT
FOR LIFE SAFETY
AND LIGHT.


PART NUMBER BUILDER

LULF30K705XTR	LULF				
EXAMPLE	FIXTURE TYPE	COLOR TEMP	OPTIC	DRIVE CURRENT	BANTAM
<i>* Indicates stock, other options may require additional lead-time.</i>	LULF - Lumenpod®	27K - 2700° K BLU - Blue 30K - 3000° K GRN - Green 40K - 4000° K RED - Red 50K - 5000° K AMB - Wildlife Amber	16 - 16° beam 23 - 23° beam 46 - 46° beam 70 - 70° beam 94 - 94° beam	*5 - 500 mA *3 - 350 mA <i>Extended life 100,000HR version requires 350 mA</i>	XTR - Machined 316 SS, post mount housing XTF - Machined 316 SS, flat surface-mount housing

ELECTRICAL SPECIFICATIONS


 Intertek <i>All electrical connections to be made by a qualified electrician in accordance with all national, state and local electrical codes.</i>	24VDC	ETL LISTED WET, IK10, IP67, CE	0-10V INPUT	-40°F TO +120°F
	INPUT VOLTAGE	CERTIFICATIONS	DIMMING	OPERATING TEMP
	CLASS 2 REQUIRED	5 YEARS	UP TO 116 LM/W LED	80+
	DRIVER	WARRANTY	EFFICIENCY	CRI

CONSTRUCTION

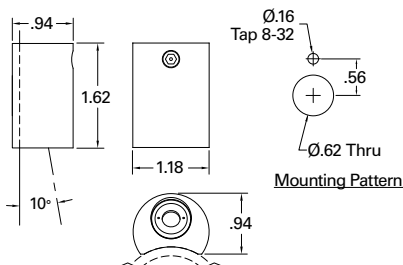

Bantam is solid machined 316 stainless steel with security hardware and is available for flat or round, 1.50"-1.90" diameter, surface mounting.

PHOTOMETRICS



Bantam is designed with an inherent 10° bias above nadir. This asymmetric feature projects the output from the mounting surface towards the path or feature. IES reports to view or download are available by scanning the QR code or visiting our website.

LUMENGEAR™ - LED DRIVER & NEMA ENCLOSURE OPTIONS

Wagner offers multiple ETL listed options for both 24VDC power supplies and NEMA enclosures. Quantities and types will be configured based on your specifications and design. Additional specification options are available by request. Not all options apply to all products, please verify compatibility with the factory.

CLASS II DRIVERS:

- *STD 100W Non Dim
- 0-10V
- Multiple Wattages
- 24VDC

NEMA ENCLOSURES:

- 4X, 6
- LUMENPOST™:**
- Integrated 100W, 0-10V DIM

Specifications may change without prior notice, verify data at time of order, all rights reserved